



Price* : 1,671.00 USD



❗ Discontinued

Commercial status

Discontinued on: 23 January 2021

End-of-service on: 24 January 2021

Main

Product or component type	All-In-One
Range of product	Homeline
Meter socket type	Ringed
Hub type	A-L

Complementary

Line Rated Current	200 A
Short-circuit current	22 kA
Mounting	Surface
Number of spaces	20
Number of circuits	40
Number of Tandem Breakers	20
Electrical connection	Lugs line side Lugs service ground
Wire Size	AWG 6...AWG 2/0 aluminium)service ground AWG 6...AWG 2/0 copper)service ground AWG 4...250 kcmil aluminium)line side AWG 4...250 kcmil copper)line side
Tightening torque	Main lugs 250 lb.in, AWG 4...250 kcmil, aluminium/copper Service ground 50 lb.in, AWG 14...AWG 2/0, copper Service ground 50 lb.in, AWG 12...AWG 2/0, aluminium Branch lugs 50 lb.in, AWG 14...AWG 2/0, copper Branch lugs 50 lb.in, AWG 12...AWG 2/0, aluminium Branch lugs 35 lb.in, AWG 6...AWG 4, aluminium/copper Branch lugs 25 lb.in, AWG 8, aluminium/copper Branch lugs 20 lb.in, AWG 14...AWG 10, aluminium/copper Branch lugs 20 lb.in, AWG 12...AWG 10, aluminium/copper Cover 10 lb.in
Disconnect	Service disconnect (factory installed)
Disconnect Rating	200 A

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

May 5, 2021

Branch Breaker Rating	200 A
Service feed location	OH UG
Bypass type	No bypass

Ordering and shipping details

Category	00148-HOMELINE CSED DEVICES
Discount Schedule	DE3A
GTIN	00785901377290
Package weight(Lbs)	52.60 lb(US) (23.859 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Package 1 Height	7.60 in (19.304 cm)
Package 1 width	22.00 in (55.880 cm)
Package 1 Length	30.70 in (77.978 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Environmental Disclosure	Product Environmental Profile


Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

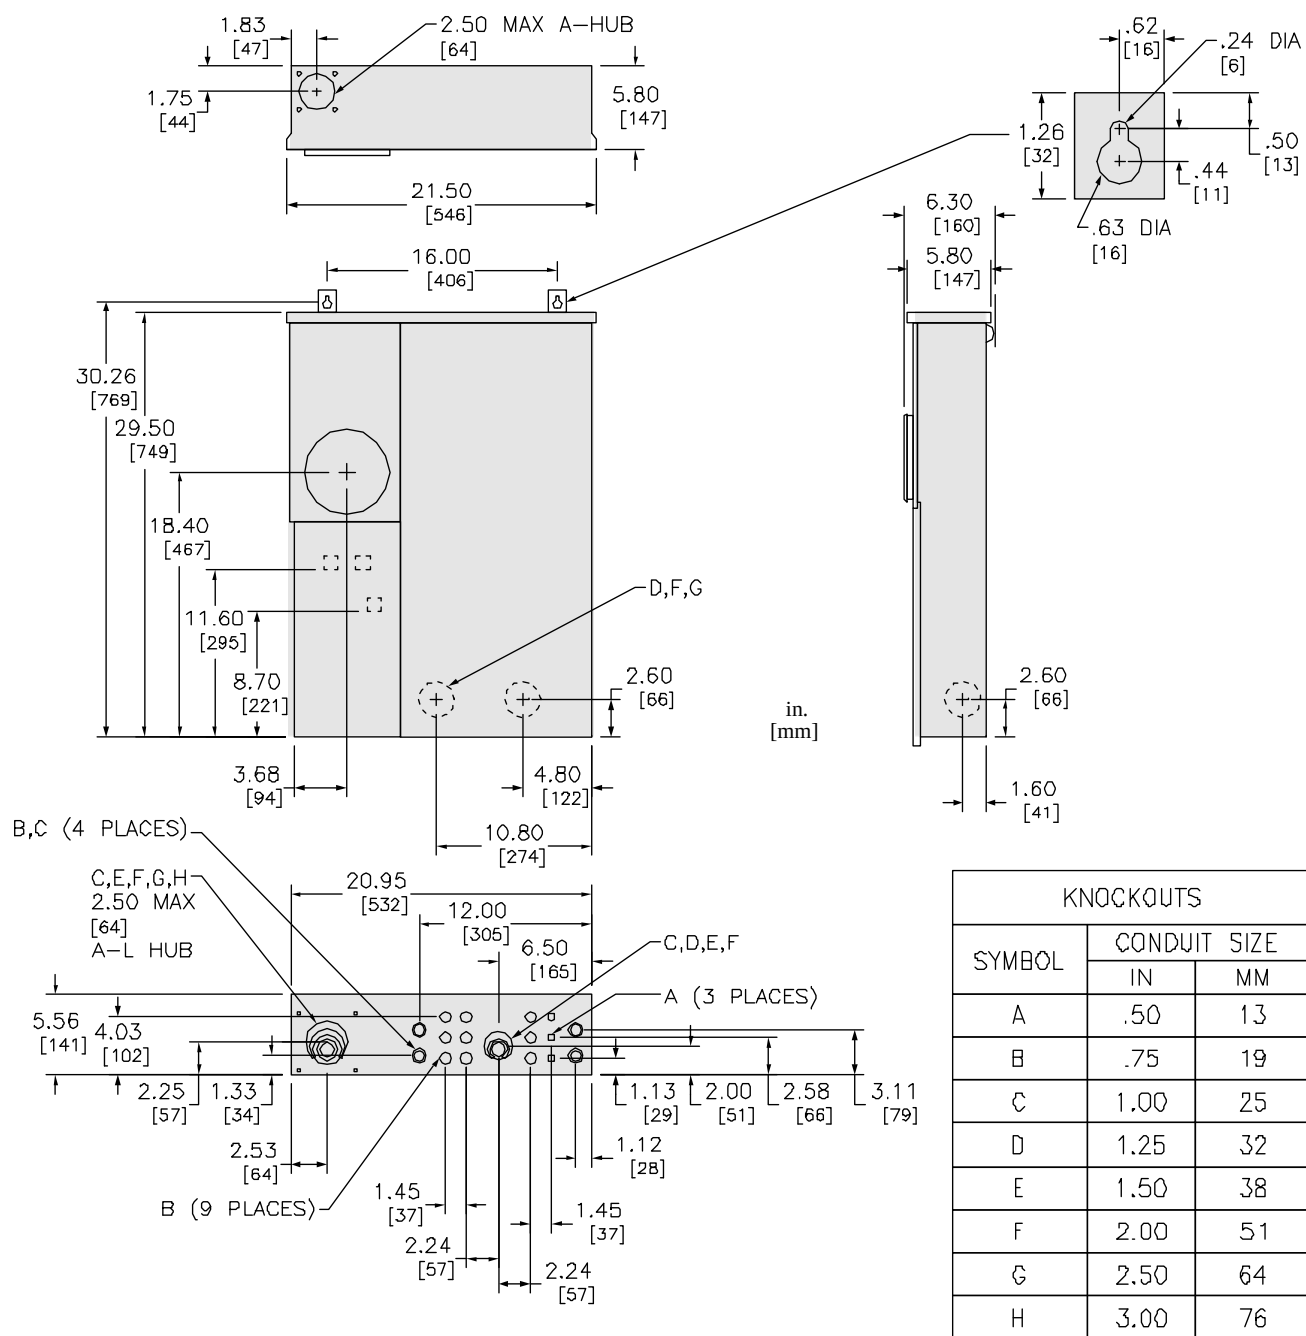

Wiring Diagram

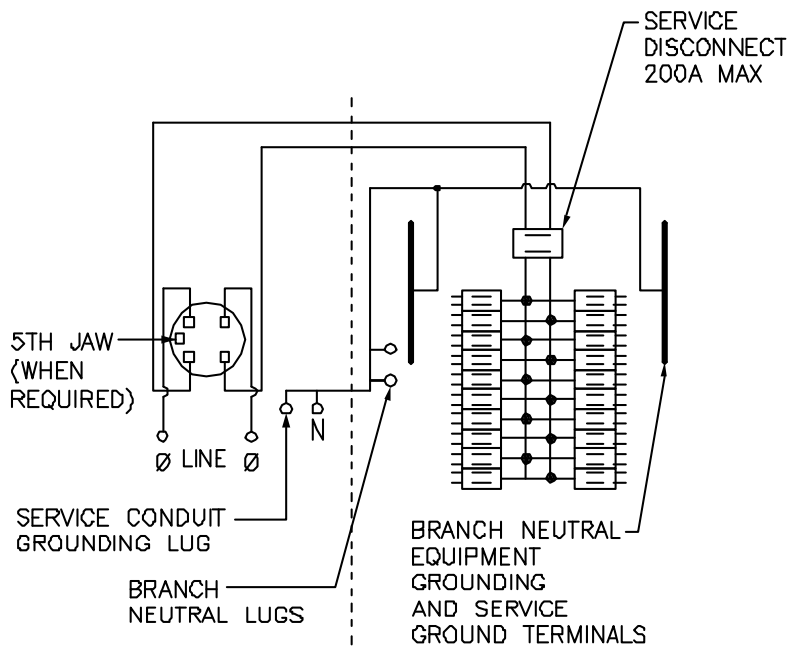

SC2040M200S

-  TWO SINGLE POLE, ONE PLUG-ON SPACE TYPE HOMT OR ONE SINGLE POLE, TYPE HOM.
TWO POLE TYPE HOM, HOMA OR HOMT (15-110A) MAY PLUG ON TWO ADJACENT SPACES.
TWO POLE TYPE HOMA (150-200A) MAY PLUG ON FOUR ADJACENT SPACES.

USE 15-110A AND 150-200A BRANCH BREAKERS ONLY
TOTAL CIRCUIT BREAKERS HANDLE RATING NOT TO
EXCEED 170A PER BRANCH CIRCUIT CONNECTOR.

A SQUARE D UL LISTED SECONDARY SURGE ARRESTER MAY
PLUG ON TWO ADJACENT SPACES. ORDER CATALOG NO.HOM2175SB

SC2040M200S is replaced by:



Solar-ready CSEDs SC2040M200PS

ALL-IN-ONE, OH/UG, surface mount, ringed socket, 200A, solar ready

Qty 1

Reason for Substitution: End of life | Substitution date: 01 January 2020
